防静电电木板
Antistatic Bakelite Plate

产品简介：

防静电电木是一种以酚醛树脂为基料的有填料化合物，添加了炭系填充材，其阻抗值稳定，防静电。

产品特点：

防静电电木板的所有部位防静电相同,体积阻抗为10^{8}–$10^{10}\Omega$，具有稳定的防静电性能。

机械加工和表面磨损之后，防静电值无变化耐有机溶剂，常温不溶解，使用温度–20–120℃，机械强度高，加工性能优异。

颜色：黑色/橘红色

行业应用：PCB钻孔，治具，配电盘，机械零件，测试台面，SMT技术工作台面。

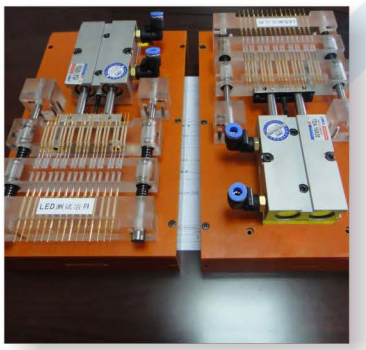

深圳市双振电子有限公司
Shenzhen Shuangzhen Electronics Co.,Ltd

地址：深圳市罗湖区笋岗东路3002号万通大厦1616
电话：0755-22380080　22380052　22380805
传真：0755-22380858

统一服务热线：**400 880 8852**
www.skmec.com

上海办事处　上海市松江区沪亭北路1080弄34号102室
电话：021-3769 0706　传真：021-3769 0705

苏州办事处　苏州市沧浪区劳动路95号14栋102室
电话：0512-68553296　传真：0512-68553297

北京办事处　北京市昌平区西环里金兰大厦1单元102室
电话：010-8978 1287　传真：010-8978 1486

青岛办事处　青岛市城阳区流亭街道办兴阳路北后楼小区22号楼1单元101室
电话：0532-85625909　传真：0532-85625906

技术参数：

项目	试验
等级 GRADE	AU-1101
特性及用途 CHARACTERISTICS APPLICATION	适用于PCB业钻孔子用垫板SUITABLE FOR
	PCB/PWB DRILLING OPERATION BACK BOARD
树脂种类型 RESIN	酚醛树脂 PHENOLIC RESIN
基材COMPOSITION	绝缘纸-木浆INSULATING PAPER-BLEACHED
	KRAFT PAPER
厚度（mm）THICKNESS	3,4,5,8,10,12,15,20,25,30,35,40,50mm
尺寸（mm）STANDARD SHEET SIZE	1010*2010mm
适合加工性FABRICATING SUITABILITY	锯或者钻孔SAWING OR DRILLING
色彩 COLOR	黑色 BLACK
比重SPECIFIC GRAVIT	1.36-1.42
燃烧等级 FLAME CLASSIFICATION UL-94	94HB
质层耐电压DJELECTRICDREAKDO C-90/20/65	＞10KV/MM
WN STRENGTHS	
整体电阻INSULATION RESISTANCE C-90/20/65	10^6-$10^9\Omega$
硬度 HARDNESS（SHOREDTRPE/HRR）	88~90/121~123HRR
耐热性 HEAT RESISTANCE A	180MIN*130℃GOOD
弯曲度WARP A	＜0.5%
吸水率WATER ABSORPTION C-24/25+D-24/23	0.6~0.9%
存放方式STORAGE室温下储存30天	20-30℃/65%RH/LEVEL/SEAL UPFOR PACKAGE

产地：德国 普克戴斯/NEG　　※上述的物性是绝干状态时的代表性数字，不是保证值。谨同参考。

产品规格:

尺寸:1000(宽)*2000(长)mm/1020（宽)*1220(长）mm
厚度:3,4,5,8,10,12,15,20,25,30,35,40,50mm

深圳市双振电子有限公司
Shenzhen Shuangzhen Electronics Co.,Ltd
地址：深圳市罗湖区笋岗东路3002号万通大厦1616
电话：0755-22380080　22380052　22380805
传真：0755-22380858
统一服务热线：400 880 8852
www.skmec.com

上海办事处　上海市松江区沪亭北路1080弄34号102室
电话：021-3769 0706　传真：021-3769 0705
苏州办事处　苏州市沧浪区劳动路95号14栋102室
电话：0512-68553296　传真：0512-68553297
北京办事处　北京市昌平区西环里金兰大厦1单元102室
电话：010-8978 1287　传真：010-8978 1486
青岛办事处　青岛市城阳区流亭街道办兴阳路北后楼小区22号楼1单元101室
电话：0532-85625909　传真：0532-85625906